

Fabrics | Curtains

01.01.2025 - V.01



Cascando®

VESCOM
CHIRA
Category C0



APPLICATION

Curtain

COMPOSITION

100% fire retardant polyester

WIDTH

317 cm

WEIGHT

143 gr/m¹

FLAME RESISTANCE

EN 13773, class 1

BS 5867 - 2, type C

NF P 92 / 503 - 507, M1

DIN 4102, B1

UNI VF 8456 - 8457, classe 1

IMO 2010 FTP part 7

NFPA 701 CAN ULC S109


FASTNESS TO RUBBING

Wet: 4-5, Dry: 4-5

(ISO 105 - X12)

LIGHT FASTNESS


6 (ISO 105 - B02)

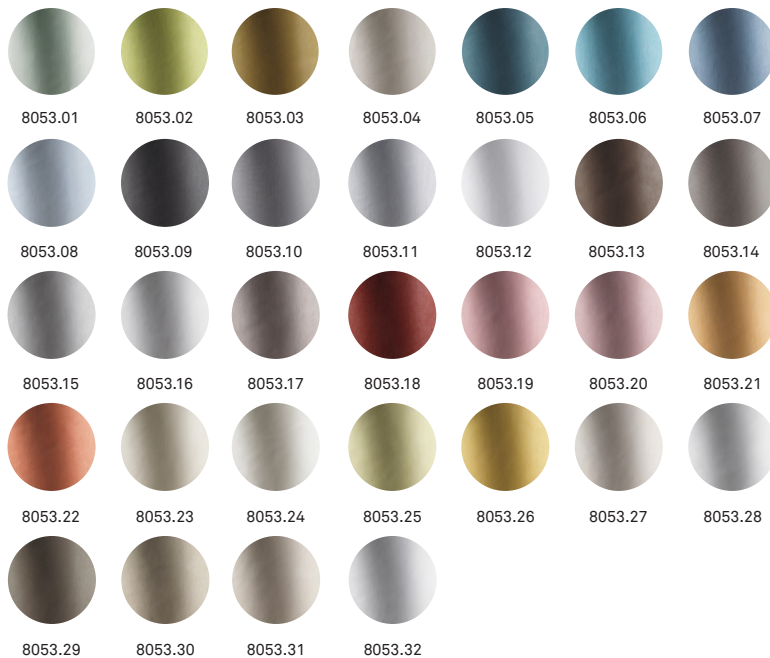

VESCOM

FOGO

Category C0



APPLICATION

Curtain

COMPOSITION

100% fire retardant polyester

WIDTH

304 cm

WEIGHT

237 gr/m¹

FLAME RESISTANCE

EN 13773, class 1 BS 5867 - 2,
type C

NF P 92 / 503 - 507, M1 DIN
4102, B1

UNI VF 8456 - 8457, classe 1
CAN ULC S109

IMO 2010 FTP part 7 NFPA 701

FASTNESS TO RUBBING

Wet: 4-5, Dry: 4-5
(ISO 105 - X12)

LIGHT FASTNESS

6 (ISO 105 - B02)



8051.01



8051.02



8051.03



8051.04



8051.05



8051.06



8051.07



8051.08



8051.09



8051.10



8051.11



8051.12



8051.13



8051.14



8051.15



8051.16

VESCOM
BEDRA
Category C0



APPLICATION

Curtain

COMPOSITION

100% fire retardant polyester

WIDTH

295 cm

WEIGHT

782 gr/m¹

FLAME RESISTANCE

EN 13773, class 1

BS 5867 - 2, type C

NF P 92 / 503 - 507, M1

DIN 4102, B1

UNI VF 8456 - 8457, classe 1

NFPA 701

CAN / ULC S109 IMO 2010 FTP
part 7


FASTNESS TO RUBBING

Wet: 5, Dry: 5


(ISO 105 - X12)

LIGHT FASTNESS

6 (ISO 105 - B02)

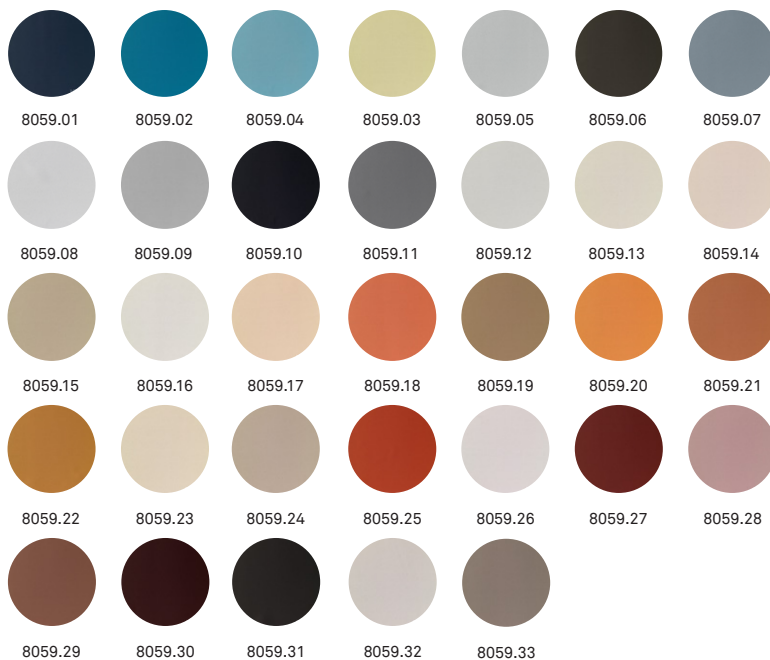

VESCOM
NIAS
Category C1

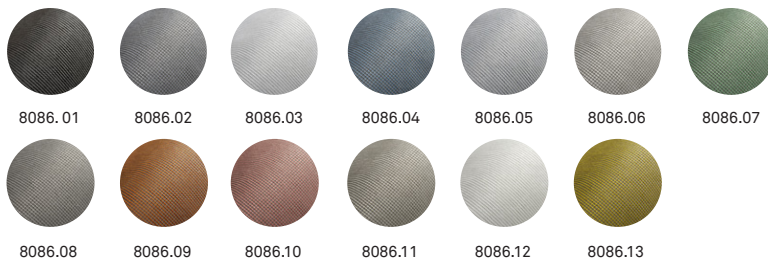

APPLICATION

Curtain

COMPOSITION

78% recycled polyesterFR /
22% polyester FR

WIDTH

315 cm

WEIGHT

375 gr/m¹

FLAME RESISTANCE

EN 13773, class 1
NF P 92 / 503 - 507, M1
DIN 4102, B1
UNI VF 8456-8457, classe 1
NFPA 701 CAN/ULC S109

FASTNESS TO RUBBING

Wet: 4-5, Dry: 4-5
(ISO 105 - X12)


LIGHT FASTNESS

6 (ISO 105 - B02)

KVADRAT

AIR4

Category C2



APPLICATION

Curtain

COMPOSITION

100% Trevira CS

WIDTH

300 cm

WEIGHT

220 g/lin.m

FLAME RESISTANCE

ASTM E84 Class A Unadhered

BS 5867 part 2 type B

CAN ULC S102

CAN ULC S109

DIN 4102 B1

EN 13 773 class 1

EN 13501-1, B-s1, d0

FAR 25.853

IMO FTP Code 2010 Part 7

JIS L 1091 A-1 D

NF P 92 507 M1


NFPA 701

SN 198 898 5.2

UNI 9177 Classe 1

LIGHT FASTNESS

6-7 (ISO 105 - B02)

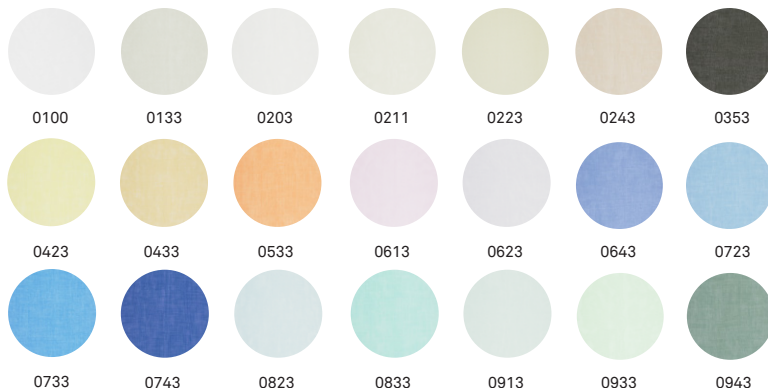

VESCOM

ELLIS

Category C2



APPLICATION

Curtain

COMPOSITION

100% Polyester

WIDTH

300 cm

WEIGHT

795 gr/m¹

FLAME RESISTANCE

EN 13773, class 1 BS 5867-2,
type C

NF P 92/503-507, M1 DIN 4102,
B1

UNI VF 8456-8457, classe 1

IMO 2010 FTP part 7

NFPA 701 CAN/ULC S109

FASTNESS TO RUBBING

Wet: 4-5, Dry: 4-5
(ISO 105 - X12)

LIGHT FASTNESS

6 (ISO 105 - B02)



8079.01



8079.02



8079.03



8079.04



8079.05



8079.06



8079.07



8079.08



8079.09



8079.10



8079.11



8079.12



8079.12

KVADRAT
DAWN2
Category C2



APPLICATION

Curtain

COMPOSITION

100% Polyester FR

WIDTH

300 cm

WEIGHT

780 g/lin.m

FLAME RESISTANCE

AS/NZS 1530.2

BS 5867 part 2 type B

CAN ULC S102

CAN ULC S109

DIN 4102 B1

EN 13 773 class 1

EN 13501-1, B-s1, d0

FAR 25.853

IMO FTP Code 2010 Part 7

JIS L 1091 A-1 D

NFPA 701

NF P 92 507 M1

SN 198 898 5.2

UNI 9177 classe 1

LIGHT FASTNESS

5-7 (ISO 105 - B02)



KVADRAT

ZULU2

Category C3



APPLICATION

Curtain

COMPOSITION

100% Trevira CS

WIDTH

300 cm

WEIGHT

300 g/lin.m

FLAME RESISTANCE

AS/NZS 1530.3

ASTM E84 Class A Unadhered

BS 5867 part 2 type B

CAN ULC S102

CAN ULC S109

DIN 4102 B1

EN 13501-1, B-s1, d0

EN 13 773 class 1

FAR 25.853

GB 8624 B1

IMO FTP Code 2010 Part 7

JIS L 1091 A-1 D

NF P 92 507 M1


NFPA 701

SN 198 898 5.2

UNI 9177 Classe 1

LIGHT FASTNESS

7 (ISO 105 - B02)

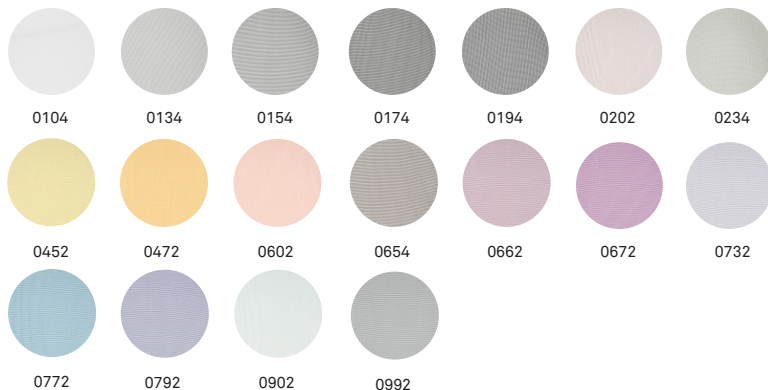

KVADRAT
DAYBREAK2
Category C3



APPLICATION

Curtain

COMPOSITION

100% Polyester FR

WIDTH

300 cm

WEIGHT

270 g/lin.m

FLAME RESISTANCE

AS/NZS 1530.2

AS/NZS 1530.3

BS 5867 part 2 type B

CAN ULC S102

CAN ULC S109

DIN 4102 B1

EN 13 773 class 1

IMO FTP Code 2010 Part 7

JIS L 1091 A-1 D

NF P 92 507 M1


NFPA 701

SN 198 898 5.2


UNI 9177 Classe 1

LIGHT FASTNESS

5-7 (ISO 105 - B02)

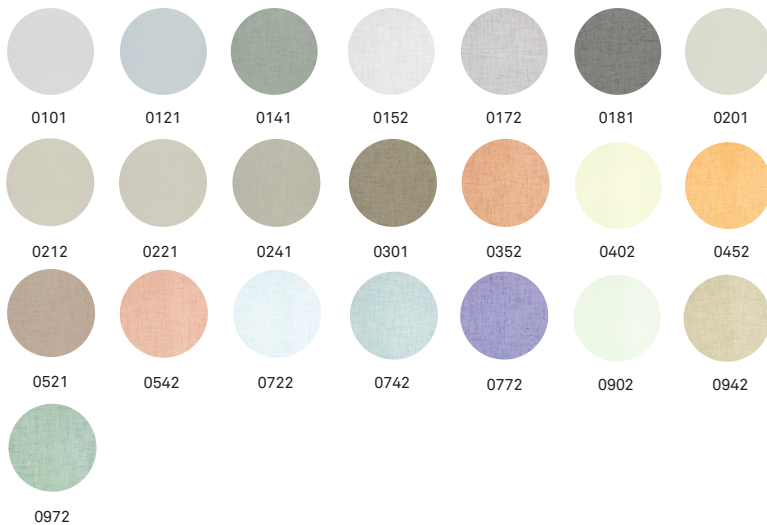

VESCOM
FORMOZA
Category C3

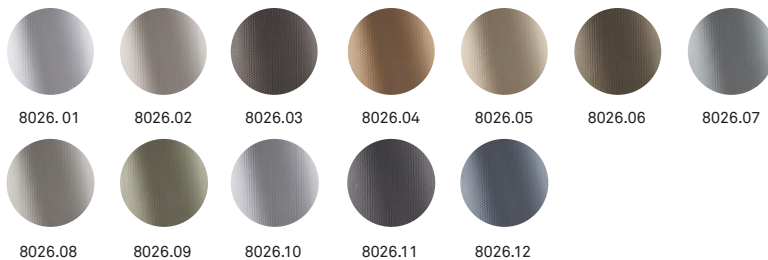

APPLICATION

Curtain

COMPOSITION

100% fire retardant polyester

WIDTH

295 cm

WEIGHT

392 gr/m¹

FLAME RESISTANCE

EN 13773, class 1

BS 5867 - 2, type C

NF P 92 / 503 - 507, M1

DIN 4102, B1

UNI VF 8456 - 8457, classe 1

NFPA 701

IMO 2010 FTP part 7

CAN ULC S109

FASTNESS TO RUBBING


Wet: 4-5, Dry: 4-5

(ISO 105 - X12)

LIGHT FASTNESS

5 (ISO 105 - B02)

KVADRAT
MI CASA
Category C4

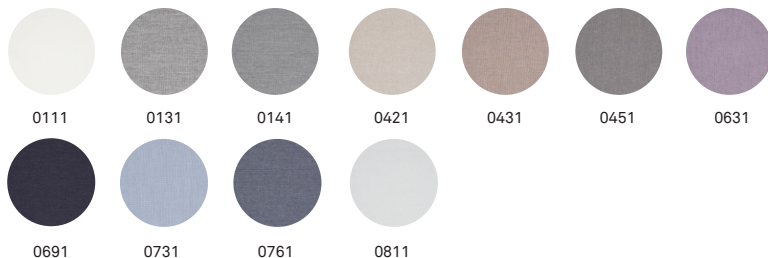

APPLICATION

Curtain

COMPOSITION

100% Trevira CS

WIDTH

300 cm

WEIGHT

600 g/lin.m

FLAME RESISTANCE

AS/NZS 1530.3

ASTM E84 Class A Unadhered

BS 5867 part 2 type B

CAN ULC S102

CAN ULC S109

DIN 4102 B1

EN 13501-1, B-s1, d0

EN 13 773 Class 1

IMO FTP Code 2010 Part 7

JIS L 1091 A-1 D

NF P 92 507 M1

NFPA 701

SN 198 898 5.2

UNI 9177 classe 1

LIGHT FASTNESS

5-7 (ISO 105 - B02)